






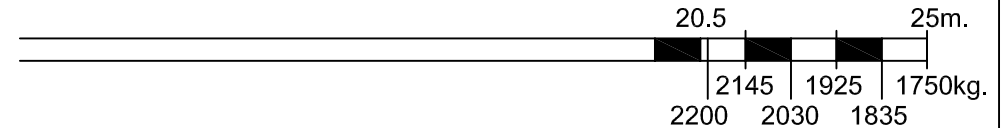



Total ballast - 15000kg  
 Central ballast - 5000kg  
 Max. travelling speed 15m/min.  
 Max. operating temperature -20° to 40° C

Transport width - 3500m

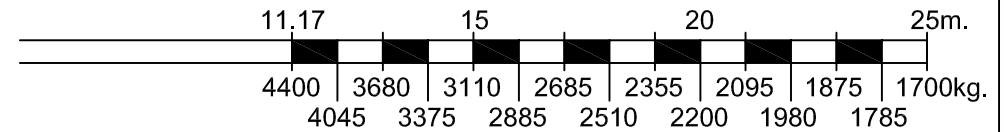

Travelling with load

- Maximum radius. 8m
- Maximum gradient 5% in direction of travel
- Ground to be capable of withstanding track pressures
- Lifted load to be maximum 1m from ground
- Maximum wind speed 12.5 m/s
- Maximum load moment of 65%

<b>Transport weight</b>	45000kg	<b>Necessary electric power</b>	380 V 50 Hz	<b>Mains supply</b>	22 kVA 50 A
<b>Maximum ground bearing pressure under tracks</b>	0.06 N/mm <sup>2</sup>	<b>Cable size</b>	0 - 50m 4 x 16mm <sup>2</sup>	<b>Generator set</b>	46 kVA 50 A